

**PSCA 40C T E**  
**PSCA 36C T E**



4000



3600



**Electrohydraulic underbody scissors type lift, for tyre specialists, car workshops, and body repairers**



**Strong support of cylinder and removable connections on base and runway for simpler maintenance**



**Configuration for flush installation**



Runboards alignment by **MASTER/SLAVE** system.



#### ADJUSTMENT BOLTS

Adjustment bolts with rubber to cushion the end of the stroke.




#### SLIDING BLOCKS

Generously sized, **self-lubricating sliding blocks**.

#### RUNWAYS WITH EXTENSION

Runway with pull-out extension



#### INCLUDED ACCESSORIES

- Self-lubricating bushings on all rotating parts
- Set of 4 rubber pads

#### RECOMMENDED ACCESSORIES


- Pair of cross pieces and pads for off-road vehicles
- Kit for pit installations

See separate catalogue for further accessories.

#### TECHNICAL DATA

Model	<i>PSCA 40C T E</i>	<i>PSCA 36C T E</i>
Lift capacity	4000 kg	3600 kg
Lifting time	45 s	
Three phase motor	400/230V - 3kW - 3Ph - 50/60Hz	
Single phase motor	230V - 3kW - 1Ph - 50/60Hz	
Max. lifting height	2010 mm	
Lift min. height	290 mm	270 mm

#### DIMENSIONS

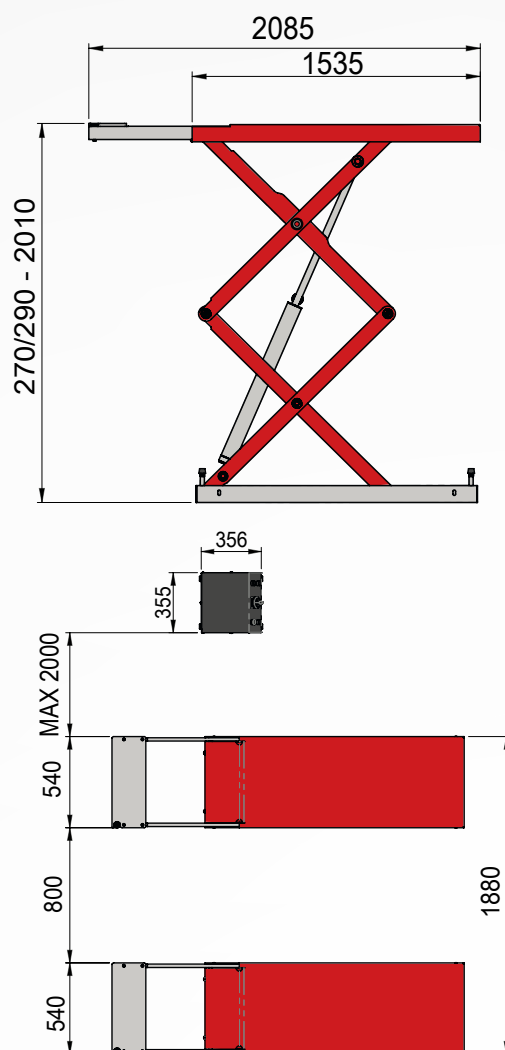

The manufacturer reserves the right to modify the features of its products at any time.

Cod. DPSC000639\_05/2024