

RR04-RR06



Rim repair system



Moving Lathe



Gear Box



Rim diameter
10"-24"



Standard Bridge
support kit



Turning Lathe
Support



Moving Lathe



V-Belt



Rim diameter
10"-26"



Standard Bridge
support kit

**Compact design, outstanding performance:
your ally for perfect rims, every day.**

Professional equipment for repairing steel and aluminum alloy rims, suitable for any type of rim repair in service of the tire specialist.

Maximum performance and maximum reliability in a solid and compact machine.

MODEL RR04



- **Slim** and **compact** supporting structure.
- **Single push cylinder** for rim straightening.
- Rim rotation transmission system with **gear reducer**.
- Ideal for low work volumes and small repairs.

TECHNICAL DATA

Height	1710 mm
Depth	972 mm
Width	1198 mm
Working pressure	140 bar
Net weight	390 kg
Hydraulic control unit motor	0,55kW / 0,75hp
Working engine	0,75kW / 1hp
Rotating speed	5-98 rpm
Power supply	230V-1Ph-50/60Hz 400V-3Ph-50/60Hz



OVERALL DIMENSIONS RR04

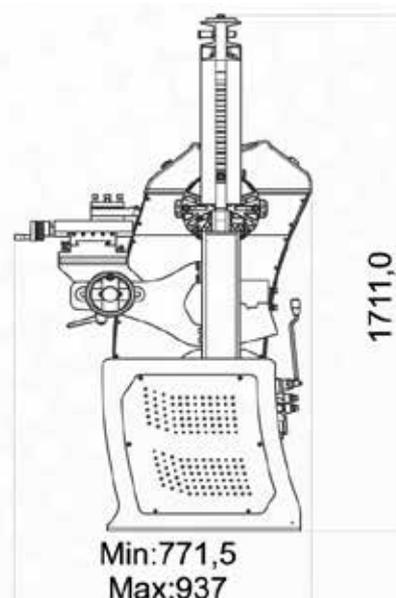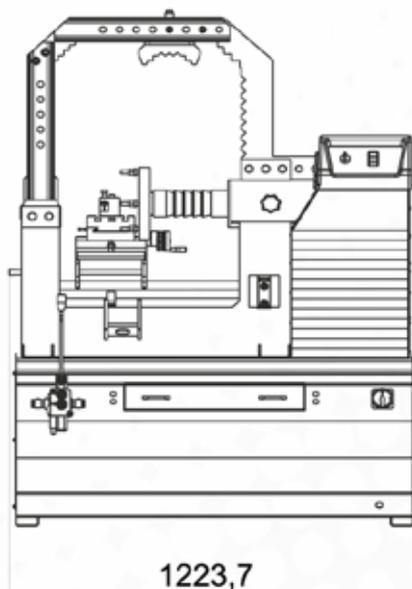

MODEL RR06



- **Solid** and **robust** supporting structure
- **Double push-and-pull cylinder** for maximum rim straightening precision
- Rim rotation transmission system with V-belt for maximum performance even during turning operations. Ideal for daily-weekly work volumes and any type of rim repair.

TECHNICAL DATA

Height	2153 mm
Depth	1032 mm
Width	1554 mm
Working pressure	140 bar
Net weight	455 kg
Hydraulic control unit motor	0,55kW / 0,75hp
Working engine	0,75kW / 1hp
Rotating speed	250 rpm
Power supply	230V-1Ph-50/60Hz 400V-3Ph-50/60Hz



OVERALL DIMENSIONS RR06

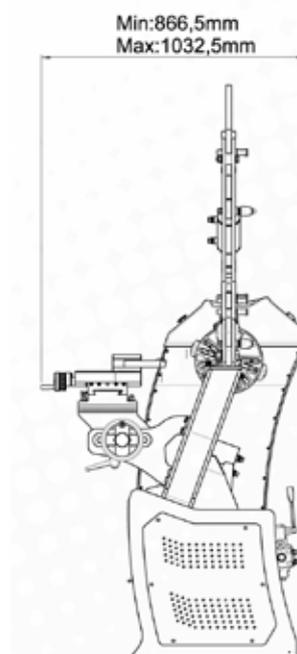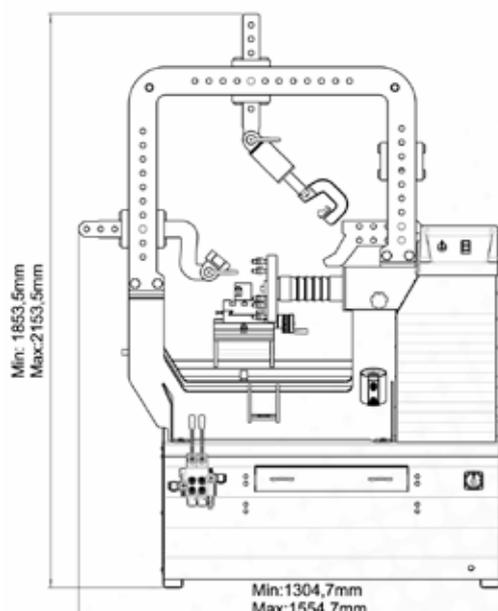

DOTATION

RR04



RR06



ACCESSORIES AVAILABLE FOR BOTH VERSIONS



8-5110061
Centering rings
Ø 56,1 ÷ 69,9 mm H10 mm



8-5110062
Centering rings
Ø 70,2 ÷ 76 mm H10 mm



8-5110078
Centering rings
Ø 73,1 ÷ 120,9 mm H10 mm



8-5110064
Electric infrared heater for rims
(400V)

8-5110065
Electric infrared heater for rims
(230V)

TECHNICAL DATA

Power supply **230V/400V**
50/60Hz


Power requirement **6 Kw**

Heating temperature **2,5 minutes = 100° C**
5 minutes = 200° C

Adjustable timer up to a maximum
of 4 minutes

High-temperature compatible
device power **cable**

Adjustable **height**

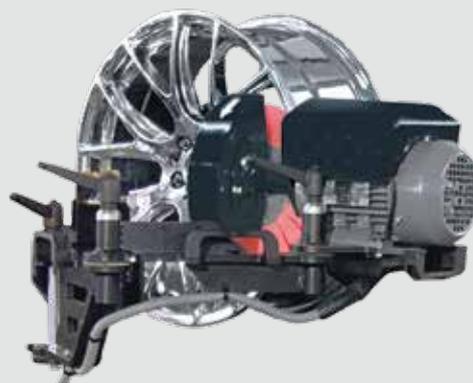

8-5110066
Polishing and cleaning kit
(for RR04)

8-5110067
Polishing and cleaning kit
(for RR06)

For further information, consult the complete accessories catalogue.

The manufacturer reserves the right to modify the features of its products at any time.

Code DPSC000763_10_2025